







SPECIFICATIONS

Rated Current: 3.0AMP
 Contact Resistance: 30mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PBT
 Max. Processing Temp: 180°C for 30-60 seconds
 (200°C for 5 seconds)

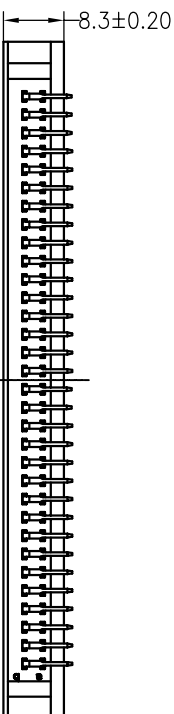


Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

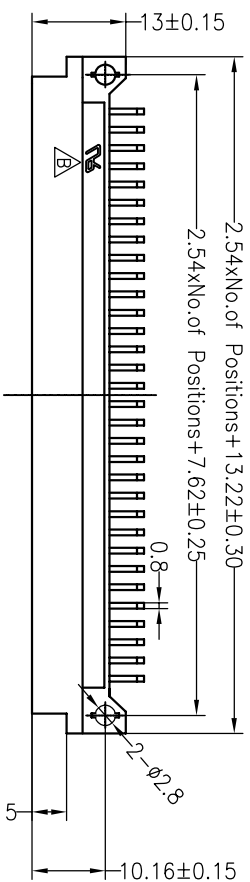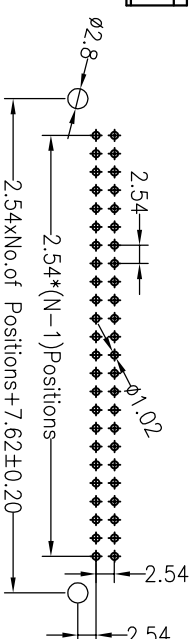

Ordering Information

35112 XX A M R XX BNA1

No. of Pins: 16P, 20P, 32P, 44P, 48P, 64P
 Contact Type: M=Male
 Contact Plating: G0: Gold Flash, S2: 1.5U" Gold, S3: 2U" Gold, S4: 3U" Gold, S5: 5U" Gold, S0: Gold Flash/Tin, SN: Tin

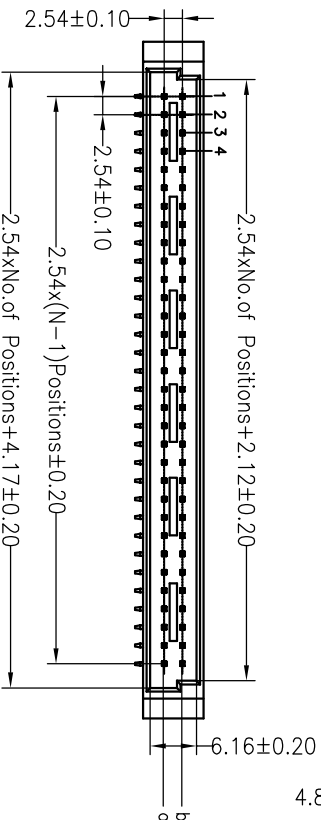

Dimension antitheses list	
ITEM	A
Standard	2.90
Alternate	

OPERATION		DRAW		SCALE		FIT		TITLE:	
OPERATION	DRAW	UNIT	FIT	PROJ.	SHEET	SHEET	1/1	PART NO.	35112XXAMRXXBNA1
X.X	Y.YuSheng	mm	A4						
X.XX ±0.30	14.09.16								
X.XX ±0.20	CHECK								
X.XXX ±0.10	APPROVE								
Angle ±3°									
DIM TOL									
CHANGE									
MODIFICATION DESCRIPTION									
DATE	2012.03.28								
REV	A0	NEW DRAWING							
		增加山标识							

JILIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892

欧式插座 公座 90度 2xNPIN 成品系列图