



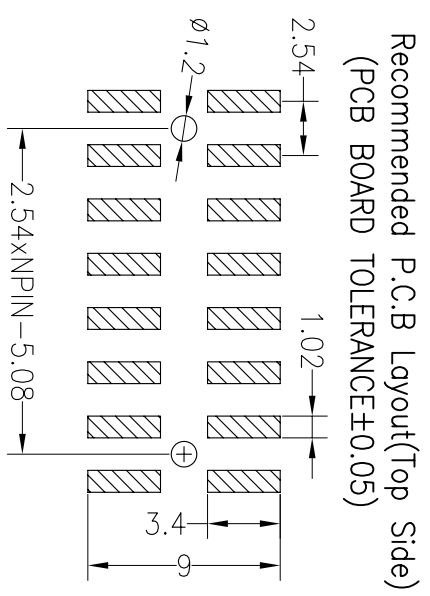

FILE NO.:E382810

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c
 Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

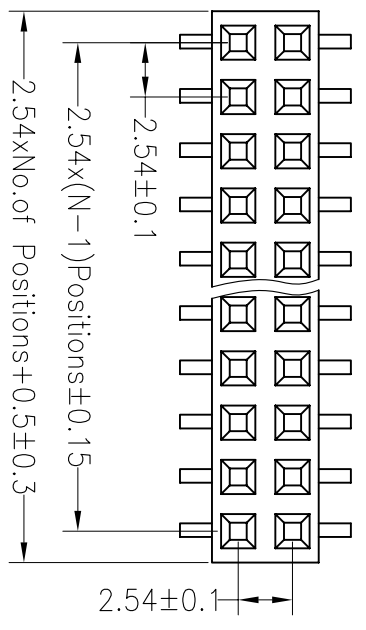

Ordering Information




2257 02 XX X X XX M Y X 01

No. of Pins Per Row 2x40
 Insulator Material Option
 A=BK-PBT
 B=BK-PA66
 C=BK-PA6T
 D=BK-PA46
 F=BK-LCP

Post W=With Post
 N=W/O Post

Contact Plating
 G0:Gold Flash
 G2:5U" Gold
 G3:10U" Gold
 G4:15U" Gold
 G5:30U" Gold
 S0:Gold Flash/Tin
 SN:Tin

Packaging
 T=Tube
 P=Tube+Cap
 R=Reel+Cap
 M=Reel+Mylar

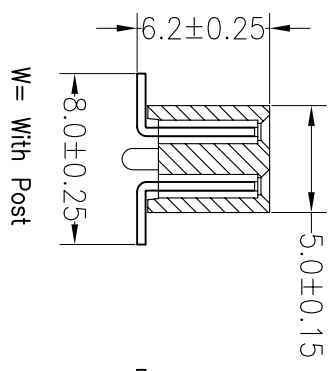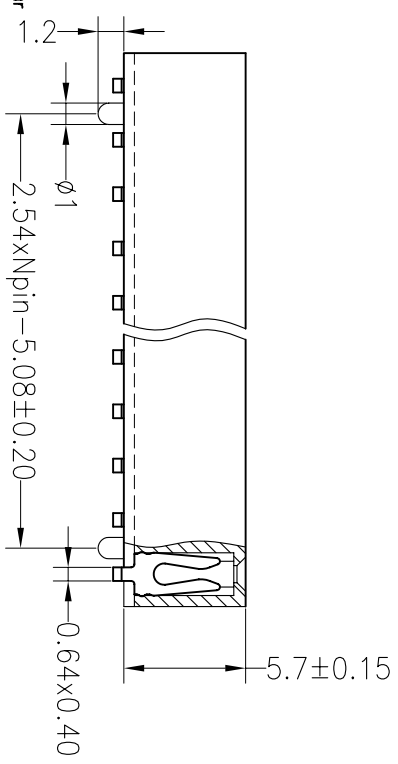

OPERATION		DRAW		YTYuSheng		12.04.26		SCALE		FIT		PART NO.	
X.X		±0.30		CHECK		A4		mm		1/1		225702XXXXXXXXXX01	
X.XX		±0.20		APPROVE		PROJ.		SHEET		1/1		2.54PF H5.7mm 2xNpin SMT	
X.XXX		±0.10		CHANGE		DIM		TOL		TITLE:			
REV		DATE		MODIFICATION DESCRIPTION		CHANGE		DIM		TOL			
A0		2012.04.26		NEW DRAWING									
1		2		3		4		5		6		7	
A		B		C		D		E		F		G	

JIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992