

SPECIFICATIONS

Rated Current: 3.0AMP
Contact Resistance: 30mΩ Max
Withstand Voltage: 1000V AC/DC
Insulation Resistance: 1000MΩ Min
Operation Temperature: -40°C to +105°C

Contact Material: Brass
Contact Plating: Au or Sn Over Ni
Insulator Material: Polyester (UL94V-0)
Standard: PBT
Max. Processing Temp: 180°C for 30-60 seconds
(200°C for 10 seconds)


Ordering Information

35113 XX A F R XX BNA1

No. of Pins: 30~120PIN
Contact Type: F=Female
Contact Plating:
G0: Gold Flash
S0: Gold Flash/Tin
S1: 2U" Gold/Tin
S2: 5U" Gold/Tin
S3: 10U" Gold/Tin
S4: 15U" Gold/Tin
S5: 30U" Gold/Tin
SN: Tin

Recommended P.C.B Layout(Top Side)

Dimension antitheses list	
ITEM	A
Standard	2.90
Alternate	

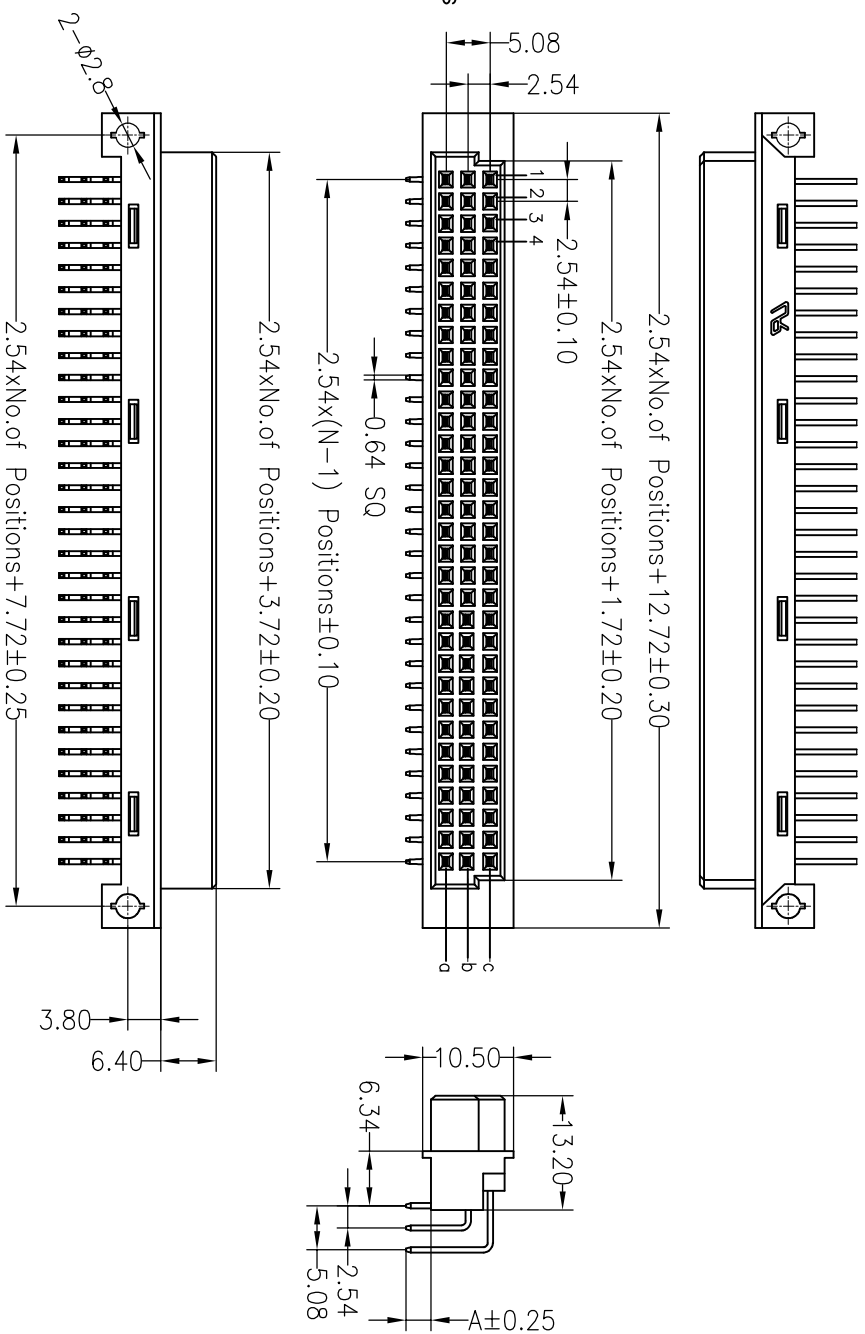

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30	YYuSheng	15.04.23	UNIT	mm	A4	1/1	35113XXAFRXXBNA1	
X.XX	±0.20	CHECK		SIZE		SHEET		DIN 41612 90° 3XN PIN Female	
X.XXX	±0.10	APPROVE		PROJ.		TITLE:			
Angle	±3°								
DIM	TOL								
CHANGE									
REV	DATE	MODIFICATION DESCRIPTION							
A0	2015.04.23	NEW DRAWING							
1									

JIN 深圳市锦凌电子有限公司
SHENZHEN JINLING ELECTRONIC CO.,LTD
Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892